


Multi-Format HD Analog IR Camera

● **ITEM No: VLDT4W/VLDT4G**

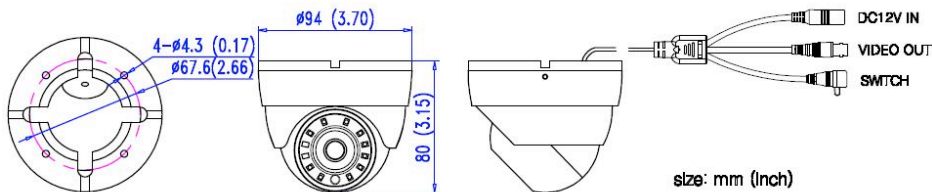

● **Caution for Installation**

1. In order to prevent electronic shock, don't loosen any screws or covers.
2. Do not directly touch the front glass. If necessary, use a soft cloth moistened with alcohol to wipe off the dust.
3. Avoid places where there are frequent vibrations or shocks.
4. Don't operate the camera beyond its temperature, power source ratings.
5. When any abnormalities happen, make sure to unplug the camera and contact your local dealer.

● **Packing**


- | | |
|----------------------------|----|
| 1. Camera | X1 |
| 2. Junction box | X1 |
| 3. User Manual | X1 |
| 4. PWA 4*25 Screw | X3 |
| 5. KM 4*10 Screw | X3 |
| 6. PM 4*12 Screw | X4 |
| 7. Junction box cotton pad | X1 |
| 8. Camera cotton pad | X1 |
| 9. Ø8.3mm rubber ring | X3 |
| 10. Plastic-Conical-Anchor | X3 |
| 11. Hexagonal Wrench | X1 |
| 12. Mounting drawing paper | X1 |

● **Specification**

ITEM	VLDT4W/VLDT4G
IP Rating	IP66
Type	Removable IR Cut Filter
Signal System	NTSC/PAL
Pick Up Device	1/2.9" 2.2 Mega Pixels CMOS
Picture Elements	1920(H)X1080(V)
Min Illumination	0Lux with IR LED 12 pieces
S/N Ratio	≥52dB
Lens	3.6mm Board Lens
3D/2D	ON
SENS-UP	ON
IR SMART	ON
White Balance	ATW
Back Light Compensation	OFF
DWDR	ON/OFF
OSD	With UTC Signal(DVR Control OSD)
Video Out-put	HD-TVI/HD-AHD/HD-CVI/ CVBS
Power Supply	DC12V ±10%
Current Consumption	400mA (MAX)
IR Effect Distance	49.2ft (Outdoor)
Dimension	3.7"×3.15" inch
Camera Weight	330g (11.64oz)
Storage Temperature	-22~+140□
Operating Temperature	-22~+104°F
Junction box	
Dimension	3.7"×1.77" inch
Weight	230g (8.1oz)

Remark: Non-regulative adaptor may cause camera damaged.

● video signal output switches

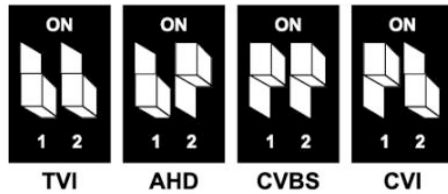

OSD Menu

MAIN MENU

MAIN MENU	
1. LENS	MANUAL
2. EXPOSURE	↵
3. BACKLIGHT	OFF
4. WHITE BAL	ATW
5. DAY&NIGHT	EXT ↵
6. NR	↵
7. SPECIAL	↵
8. ADJUST	↵
9. EXIT	SAVE&END ↵

1 LENS	MANUAL/DC#
2 EXPOSURE	#
3 BACKLIGHT	OFF/BLC#/HSBLC#
4 WHITE BAL	ATW/AWB/AWC-SET/INDOOR/OUTDOOR/ MANUAL#
5 DAY&NIGHT	AUTO#/COLOR/B/W#/EXT#
6 NR	#
7 SPECIAL	#
8 ADJUST	#
9 EXIT	SAVE&END#/RESET#/NOT SAVE#

LENS

DC LENS MODE	
1. MODE	INDOOR
2. IRIS SPEED	8
3. RETURN	RET ↵

1 MODE	INDOOR/OUTDOOR#
2 IRIS SPEED	0-15
3 RETURN	RET#

EXPOSURE

EXPOSURE	
1. SHUTTER	AUTO
2. AGC	7
3. SENS-UP	AUTO ↵
4. BRIGHTNESS	56
5. D-WDR	OFF
6. DEFOG	OFF
7. RETURN	RET ↵

1 SHUTTER	AUTO/ 1/30 / 1/60 / FLK / 1/240 / 1/480 / 1/1000 / 1/2000 / 1/5000 / 1/10000 / 1/50000 / X2 / X4 / X6 / X8 / X10 / X15 / X20 / X25 / X30
2 AGC	0-15
3 SENS-UP	AUTO#
4 BRIGHTNESS	1-100
5 D-WDR	OFF/AUTO/ON#
6 DEFOG	OFF/AUTO#
7 RETURN	RET#

DEFOG

1. POS/SIZE	↵
2. GRADATION	0
3. DEFAULT	↵
4. RETURN	RET ↵

1 POS/SIZE	POSITION/SIZE/RET AGAIN
2 GRADATION	0-2
3 DEFAULT	#
4 RETURN	RET#

BACKLIGHT

BLC	
1. LEVEL	MIDDLE
2. AREA	↵
3. DEFAULT	↵
4. RETURN	RET ↵

1 LEVEL	MIDDLE/LOW/HIGH
2 AREA	POSITION/SIZE/RET AGAIN
3 DEFAULT	#
4 RETURN	RET#

DAY&NIGHT

B/W	
1. BURST	OFF
2. IR SMART	OFF
3. RETURN	RET ↵

1 BURST	OFF/ON
2 IR SMART	OFF/ON#
3 RETURN	RET#

D&N AUTO	
1. D--N(AGC)	18
2. D--N(DELAY)	58
3. N--D(AGC)	6
4. N--D(DELAY)	46
5. RETURN	RET ↵

1 D--N(AGC)	1-255
2 D--N(DELAY)	0-60
3 N--D(AGC)	1-255
4 N--D(DELAY)	0-60
5 RETURN	RET#

NR

NR	
1. 2DNR	MIDDLE
2. 3DNR	MIDDLE
3. RETURN	RET ↵

1 2DNR	HIGH/MIDDLE/LOW/OFF
2 3DNR	HIGH/MIDDLE/LOW/OFF
3 RETURN	RET#

SPECIAL

SPECIAL	
1. CAM TITLE	ON ↵
2. D-EFFECT	↵
3. MOTION	OFF
4. PRIVACY	OFF
5. LANGUAGE	ENG ↵
6. DEFECT	↵
7. RS485	↵
8. RETURN	RET ↵

1 CAM TITLE	OFF/ON#
2 D-EFFECT	FREEZE/MIRROR/NEG.IMAGE/RETURN
3 MOTION	OFF/ON#
4 PRIVACY	OFF/ON#
5 LANGUAGE	ENG#/CHN1#/CHN2#/GER#/FRA#/ITA#/ SPA#/POL#/RUS#/POR#/NED#/TUR#
6 DEFECT	#
7 RS485	#
8 RETURN	RET#

D-EFFECT

1. FREEZE	ON
2. MIRROR	OFF
3. NEG. IMAGE	OFF
4. RETURN	RET ↵

1 FREEZE	OFF/ON
2 MIRROR	OFF/MIRROR/V-FLIP/ROTATE
3 NEG. IMAGE	OFF/ON
4 RETURN	RET#

DEFECT

1. LIVE DPC	ON ↵
2. WHITE DPC	ON ↵
3. BLACK DPC	ON ↵
4. RETURN	RET ↵

1 LIVE DPC	OFF/ON
2 WHITE DPC	OFF/MIRROR/V-FLIP/ROTATE
3 BLACK DPC	OFF/ON
4 RETURN	RET#

ADJUST

ADJUST	
1. SHARPNESS	AUTO ↵
2. MONITOR	LCD ↵
3. LSC	ON
4. VIDEO OUT	PAL
5. RETURN	RET ↵


1 SHARPNESS	OFF/AUTO#
2 MONITOR	LCD#/CRT#
3 LSC	OFF/ON
4 VIDEO OUT	NISC/PAL
5 RETURN	RET#

EXIT

EXIT	
1. EXIT	RESET ↵


1 EXIT	SAVE&END#/RESET#/NOT SAVE#
--------	----------------------------

● **Overview**

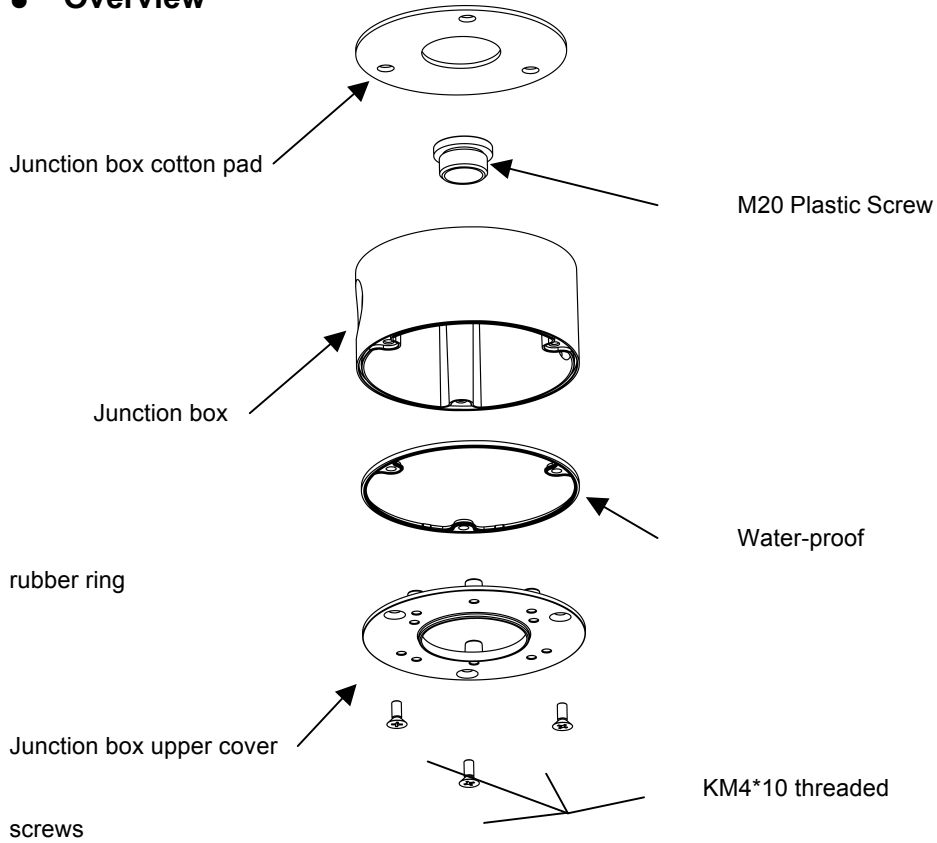


● **Installation**

(1)




1. Drill installation holes according to drawing paper, then stuff into rubber stoppers.

(2)




2. Paste cotton pad onto the bottom of junction box, then push the water-proof rubber ring onto the upper body of junction box.

(3)




3. Use 3pcs PWA4*25 self-tapping screws to fix junction box body.

(4)





4. Use 3pcs KM4*10 threaded screws to fix the upper cover with the junction box body.

(5)



5. Disassemble the dome base, put the cotton pad onto the upper cover, then use 4pcs PM4*12 screws to fix the dome base with the junction box.

(6)

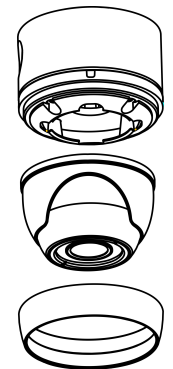

6. Connect all cables and put them into the junction box, then install the dome with the dome base well, then use the dome ring to fix.