



# iSecure **NOW AVAILABLE!**

Complete Professional Cellular Alarm Systems



Fast-track adding more accounts,  
RMR & return on investment than ever possible



**Introducing iSecure. Game-changing, all-inclusive cellular alarm systems, designed to give security professionals an all-new, competitive edge for adding more residential accounts faster & more economically than ever before. Now you can easily afford to offer the security and control today's savvy consumers are looking for, with smart App & notifications. Plus, get the easy, flexible 1-hour installation and phone-programming you want, all at a price that guarantees you the quickest payback and return on investment, backed by Napco reliability. Did we mention, StarLink LTE reporting is already built in, too?**

The iSecure System centers on the advanced multifunction iSecure Go-Anywhere™ Smart Hub with up to 80 zones, for intrusion & fire, with built in dual path StarLink Cellular/IP LTE alarm reporting, 85db

siren, wireless receiver, + Z-Wave controller in both Touchscreen Kits. Like the name says, the hub goes anywhere, wall-mount or tabletop, so it can be positioned for best signal reception and out of harm's way, for less vulnerability to smashing/disabling the system. (Signal strength metering is built in, too.)

Designed for a professional installation in as little as an hour, iSecure also features cloud-based smartphone dealer-programming with easy dropdown menu selections for customizing system configuration and options in minutes; plus the Go-Anywhere Hub uses a professional 4Ah battery for longest power outage protection - 24-hours standby time, avg.\*\* The dual path cellular/IP communicator built-in also features Napco StarLink's Signal Boost™ circuitry and internal dual diversity antennae, to maximize signal absorption and null avoidance, for best performance, even in fringe areas & on low-powered LTE networks.

Ideal for any application & budget, iSecure Series Systems feature a choice of three all-inclusive kits, complete with Go-Anywhere Hub, either a wireless keypad or a 4" or 7" multifunction color touchscreen, plus two wireless window/door sensors and wireless PIR. There's also a full line of iSecure optional accessories to customize and extend any system including, keyfob, wireless glassbreak, smoke, heat and CO detectors, extra plug-in siren(s), and a takeover module to add-in wired zones/devices zones from a preexisting wired system.

## ALL iSecure Series Systems Feature


- **Up to 80 zones, intrusion & fire** from iSecure Wireless Transmitters
- **App for security, automation & SMS text notifications** alerts/reminders
- **1-hour installation - + dealer programming from a smart phone/** device in minutes (NO PC to lug around)
- **Built-in dual path LTE cellular/IP reporting (included inside)/** StarLink-Incentive-eligible (already reflected in Net Kit prices)\*
- **2 Economical unlimited signal/notification plans,** simply choose with & w/o automation.
- **Go-Anywhere Smart Hub™** - position for best signal reception & smash prevention, 85db UL-rated siren & receiver built in
- **Pro 4Ah battery for longest power outage protection -** for approx. 24 hours standby time\*\*
- **One or two areas**
- **Choice of Wireless Keypad or 4" or 7" Touchscreens,** up to 5 can be intermixed/system
- **Choice of 3 All-Inclusive Kits** with either wireless LCD keypad, 4" security touchscreen (shown at right), or IoT 7" Security/Video/Connected Home touchscreen

- **All Kits include 2 Window/Door Transmitters & Wireless PIR**
- **Z-Wave control built-in in both Touchscreen Kits,** for up to 232 Z-Wave devices
- **Full line of optional iSecure Accessories also available:** Wireless siren, keyfob, panic, wireless smoke-, glassbreak- or carbon monoxide detectors



## 1-Hour Professional Installation

- **Full line of professional iSecure accessories & options available** Choose from Wireless CO, glassbreak, smoke, heat, keyfob & panic button, plug-in extra sirens & Takeover Module, plus, all-new wireless keypads and touchscreens & more
- **Easy system programming in minutes all from your phone.** No more PC or software to learn. Make menu-driven choices on your cell or tablet, like system configuration, etc.
- **Easy, cloud-based portal screens let you simply select options** Add and/or re/learn devices, like the keypad or touchscreen. Also assign either of 2 areas if desired

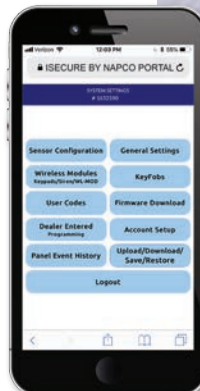

## 3 Professional iSecure Complete Cellular Alarm Kits:

### KIT01

#### iSecure Kit 1 with Wireless LCD Keypad

- **All-Inclusive:** Go-Anywhere Smart Hub w/ up to 80 zones/points, 85dB Siren and Dual Path Cell/IP Verizon® LTE Reporting built-in, **Wireless LCD Keypad** (lithium battery-powered), Security & Notifications from Consumer App, 50' Wireless PIR & 2 wireless window/door contact transmitters. Uses Pro 4Ah Battery for longest power outage protection (24hrs standby time, avg.)  
#ISEC-KIT1, iSecure KIT 1



### KIT02

#### iSecure Kit 2 with Color 4.3" Security Touchscreen

- **All-Inclusive:** Go-Anywhere Smart Hub w/ up to 80 zones/points, 85dB Siren and Dual Path Cell/IP Verizon® LTE Reporting built-in, **Wireless Security Touchscreen**, **Built-in Z-Wave Control from Consumer App**, along with virtual keypad & SMS text notifications, 50' Wireless PIR & 2 wireless window/door contacts. Uses Pro 4Ah Battery for longest power outage protection (24hrs standby time, avg.)  
#ISEC-KIT2, iSecure KIT2



### KIT03

#### iSecure Kit 3 with Connected Home/Video/Security 7" Touchscreen

- **All-Inclusive:** Go-Anywhere Smart Hub w/ up to 80 zones/points, 85dB Siren and Dual Path Cell/IP Verizon® LTE Reporting built-in; **Built-in Z-Wave Control** from touchscreen or App. **Wireless Multifunction 7" TFT Security Touchscreen controls smart automation, live video-viewing, notification alerts/alarms and home security functions.** One 50' Wireless PIR & 2 wireless window/door contact transmitters. Uses Pro 4Ah Battery for longest power outage protection (24hrs standby time, avg.)  
#ISEC-KIT3, iSecure KIT3



## Full Line of Optional iSecure Accessories:

### KEYFOB

- 4-Button operation: 2 for On/Off of security system and 2 programmable for Aux. functions, e.g. panic, medical, relays or relay groups, instant
- Visual indicator for transmission or low battery
- Includes keyring, chain, replaceable battery



### WIRELESS WATERPROOF PANIC

- Waterproof personal panic button
- Worry-free peace of mind
- 1-button operation with tactile feedback click
- Extra-large, soft touch button for trouble-free use even by dexterity-impaired or arthritic hands



### WIRELESS SMOKE DETECTOR

- Designer styling and longer battery life
- Long 5-year battery life, typ. (batteries included)
- Compact 5.2" diameter; attractive decorator white
- Built-in silence feature and test button
- Visual LED indicates alarm & standby
- Audible/visual indicator for low-battery & need for detector cleaning



### WIRELESS CO DETECTOR

- 5.38 diameter and approx. 2" profile, uses 3V Lithium Battery for long life
- Monitor alarms, restores, low battery, tamper and status



### WIRELESS HEAT DETECTOR

- High-quality 135°F (57°C) fixed temperature detector with rate of rise
- Reliable, crystal-controlled wireless technology
- Long-life, replaceable lithium batteries



### ADDITIONAL WIRELESS SIREN(S)

- For more alarm sounding throughout premises, up to 4 optional wireless sirens can be used in addition to the one built-into the Go-Anywhere Hub
- Plug into AC or optional battery operation (wall-mount)
- 85dB at 10', UL-Rated
- Supports Siren, Temporal Fire and CO alarm audible cadences
- Integral bright LED strobe
- Operable from 110VAC with battery-backup or Batteries-only
- Battery-only operation with 4 standard Alkaline C cell batteries up to 3 years typ.
- Supervises battery, and detects and notifies low battery condition
- Optional Tamper magnet-activated switch
- Indoor or outdoor operation
- Supports OTA firmware updates



### ISECURE TAKEOVER MODULE

- Easily convert an existing wired security system's zones to wireless and eliminate rewiring or replacing installed sensors.
- Converts up to 8 wired zones and into 8 supervised wireless zones.
- Use the existing wiring for each of these devices and convert them into iSecure system wireless zones on the Hub.
- Status LED through housing cover
- Up to 4 Takeover Modules, for 32 zones, max., are supported/system



### IBRIDGE VIDEO CAMERAS & VIDEO DOORBELL

(See Ordering Info.)



# iSecure Components & Specifications:

## GO-ANYWHERE HUB (ISEC-CONTROL)

- **Dimensions:** 12.25"W x 9.5"H x 3.38"D
- **Installation:** Wall mount, or use free-standing as tabletop unit, no-mar base pads (supplied)
- **LED Indicators** integral red, yellow, green LEDs & corresponding icons indicate various system conditions and/or status: RF signal-strength metering, status, fire, trouble, bypassed, wireless sensor transmissions, operational status, IP/WiFi Network metering/status.
- **Integrated Functions** Cell/IP Reporting w/ dual internal LTE antennae; 10/100 Ethernet Interface (for backup central sta. communications & notifications), Wireless Radio & 319MHz Receiver; 85dB Siren, Voice Speaker w/ 4 Volume Levels. Also, Z-Wave Controller in Touchscreen KITs (KIT2, KIT3 Models)
- **Operating Temperature:** 0-49°C (32-120°F)
- **Input Power:** 16.5VAC via CLASS 2 Plug-In 16.5VAC transformer
- **Loop Voltage:** 10-13VDC
- **Loop Current:** 2.4mA with 2.2K Ohm end-of-line resistor (Model EOL2.2K); 5mA for 2-wire smoke-sensor zones
- **Loop Resistance:** 300Ω max.; 50Ω for 2-wire smoke-sensor zones
- **Supervised BELL output terminal for burg/fire alarm.** 12.5-11.0 300mA Max combined output bell + PGM.
- **Combined Standby Current** (Remote Power + Aux. Power + Reset Relay Power): 2.4mA
- **Standby Time & Backup Battery:** 12VDC 4Ah rechargeable battery required, for power outage protection, from >24hrs to <18hrs, depending on Kit, and use of network &/or AC. Consult WI2240 for detail. For longer duration also use with 12VDC, 5AH models
- **PGM Output:** 100mA max, 12.5-11.0VDC
- **Keypad:** 100mA; 35mA if backlighting is disabled (cut W1, W2 & W3)
- **4.3" Touchscreen:** uses 1A, 12V plug in wall transformer, power supply provided
- **7" Touchscreen:** uses 1A, 12V plug in wall transformer, power supply provided
- **Maximum Number of Keypads:** 5

## WIRELESS WINDOW/DOOR TRANSMITTER

- **Dimensions:** 2.5H x 1W x 0.4D"
- **Power:** 3-volt lithium battery supplied, CR/DL2032
- **Nominal Battery Life** 5 years.
- **Supervised:** Reports low-battery voltage to receiver

## WIRELESS PIR

- **Dimensions:** 4.5" x 2.5" x 1.7" (11.4cm x 6.4cm x 4.3cm) (HxWxD)
- **PIR Coverage (L x W):** 50' x 50' (15.2m x 15.2m) at 20°C (68°F), typ.
- **Operating Temperature:** 0° to +50°C (32° to 122°F)
- **Mounting:** Wall or corner, 10' (3m) max.

## WIRELESS KEYPAD

- **Housing Dimensions (WxHxD):** 4.5" x 2.5" x 1.7" (11.4cm x 6.4cm x 4.3cm) (HxWxD)
- **Operating Temperature:** 32 to 120 °F (0 to 49 °C)
- **Maximum Humidity:** 85% non-condensing relative humidity Sensor
- **Replacement Battery:** One Energizer 3V 123 lithium battery supplied. Note: To extend battery life further, two batteries may be used
- **Battery Voltage:** 3.0 VDC (Nominal), 2.1 VDC (Low), with Low Battery Supervision. When battery or batteries are low, "Lb" will appear in the keypad display.
- **Nominal Battery Life:** 1 year when one battery is used; 2 years when two batteries are used
- **Current Draw:** 70mA (Maximum), 70uA (standby)

## 4.3" SECURITY TOUCHSCREEN

- **Housing Dimensions (WxHxD):** 5.38x 3.75x 1.38 inches (13.7 x 9.5 x 3.5 cm)
- **Operating Temperature:** 32 to 120 °F (0 to 49 °C)
- **Maximum Humidity:** 85% non-condensing relative humidity
- **Current Draw:** 110mA (Maximum), 95uA (standby)

## 7" CONNECTED HOME MULTIFUNCTION TOUCHSCREEN

- **Dimensions (WxHxD):** 5.38 x 7.87 x 0.88 in. (13.7 x 20 x 2.2 cm)
- **Operating Temperature:** 0-49°C (32-120°F)
- **Speaker:** 1 Integral 2W

### Electrical Ratings

- **Screen on, idle:** 300mA
- **Screen, in use:** 380mA. (also see WI for details)
- **CPU:** Quad core processor, (up to 1.6GHz)
- **Wi-Fi:** 802.11b/g/n with integral antenna
- **LCD Size:** 7 inch digital screen
- **Resolution Ratio:** 1024 x 600 x, 16:9 aspect ratio, 16.7 million colors
- **Pixels:** 1024 x RGB (3) x 600
- **Touchscreen:** Digital and full-screen, capacitive

## KEYFOB

- **Dimensions:** 3.0 x 1.25"
- **Operation:** 4-Button, Arm; Disarm + 2 auxiliary programmable buttons, A1 & A2.
- **Input Power:** 3-Volt lithium coin cell battery CR/DL2032
- **Low Battery:** LED indicator lights and pulses 30 secs; also sent to receiver

## PANIC

- **Dimensions:** 1.75W x 2.57H"
- **Power:** Two replaceable Energizer 386 1.5V, Silver Oxide Cells power
- **Low Battery Indication** a flashing LED indication

## WIRELESS GLASSBREAK DETECTOR

- **Dimensions:** 3.13 x 4.24 x 1.7" (8.0 x 10.8 x 4.3cm) (H x W x D)
- **Microphone:** Electret, omnidirectional
- **Temperature Range:** 32°F to 120°F (0°C to + 50°C)
- **Range of Coverage** (radius distance from sensor): Plate Glass, 25' (7.6m); Tempered, Wired, or Laminated Glass, 20' (6m). For Glass thicknesses and use with tester, consult WI.

## WIRELESS SMOKE DETECTOR

- **Electrical Ratings**
- **Input Power:** Transmitter powered by a 3-volt lithium battery supplied; uses CR/DL123A. Sensor powered by 9V Alkaline Battery.
- **Dimensions:** 5.2" Diameter
- **Low Battery Indicator** local and sent to receiver
- **Operating Environment**
- **Temperature:** 32°F to 122°F (0°C to 49°C)
- **Relative Humidity:** 15% - 95% RH

## WIRELESS CARBON MONOXIDE DETECTOR

- **Electrical Ratings**
- **Input Power:** Powered by a 3-volt lithium battery. Use one 3-volt lithium CR/DL123A battery, supplied.
- **Dimensions (WxLxD):** 5.38 x 5.38 x 2.13" (13.7 x 13.7 x 5.4cm)
- **Operating Environment**
- **Temperature:** 32°F to 122°F (0°C to 49°C)
- **Relative humidity:** 15% - 95% RH

## WIRELESS HEAT DETECTOR

- **Dimensions:** 4.57" Diameter
- **Fixed temperature detector with Rate of Rise:** 135°F (57°C)
- **Rate-of-Rise:** A temperature increase of 150F or more per minute will result in an alarm transmission. When the rate-of-rise element alone has been activated, the detector is self-restoring.
- **Fixed Temperature:** If the temperature of the center disk rises to the detector's rated temperature (135°F / 57°C) an alarm transmission will result. When actuated by the fixed temperature element, the detector is non-restorable and must be replaced. The need for replacement is indicated when the center disk has fallen free.
- **Input Power:** Powered by a 3-volt lithium battery, supplied; uses CR/DL123A.

## WIRELESS INDOOR /OUTDOOR EXTRA SIREN

- **Dimensions (WxHxD):** 3.5 x 6.75 x 2.38 inches (8.9 x 17.1 x 6 cm) when flush against wall; 3 inches (7.62 cm) including AC prongs
- **Indoor Operating Temperature:** 32 to 120°F (0 to 49°C)
- **Outdoor Operating Temperature:** 0 to 120°F (-18 to 49°C)
- **Replacement Batteries:** 4 C-Size (Alkaline)
- **Battery Voltage:** 6.0 VDC (Nominal); 4 Duracell C-Size batteries with low-battery supervision and audible low-battery warning
- **Nominal Battery Life:** 1 year standby typical; 200 alarm sequences typical; constant alarm 7 hours typical
- **AC Input:** 120 VAC, 60Hz
- **Current Draw:** 70mA (Maximum), 70uA (standby)
- **Sound Pressure:** 85dB minimum Dual Piezo Horn (measured at 10')
- **Supported:** 4 per system

## TAKEOVER MODULE

- **Dimensions (WxHxD):** 6"W x 3.5"H x 1.5"D (minus screws)
- **Input Power:** 12.5 - 7.5VDC, 60mA.
- **Zone Loop current:** 4.7mA nominal, 5.5mA when shorted.
- **Maximum Zone Loop Resistance:** 300 ohms.
- **2.2K End of line resistor** (UL Listed part number EOL2.2K required in Fire applications).
- **Output Power:**
- **PGM Output (Active low):** 5mA, 12V. Connect only to power-limited circuits less than 14VDC. Use only in Burglary applications.
- **Ground Faults Detected:** 1.25KΩ to ground or less.
- **Supported:** 4 per system, for up to 32 wired zones, max.

**FOR FULL SPECIFICATIONS, PLEASE SEE WI2240LF. NOTE: GEMINI TRANSMITTERS ARE NOT SUPPORTED BY ISECURE SYSTEMS**


# ALL iSecure Series Systems Feature:

## GO-ANYWHERE™ HUB

- **iSecure Go-Anywhere™ Smart Hub** with built in StarLink™ LTE dual path Cell/IP communications (no landlines to cut or needed); up to 80 wireless zones/points for intrusion & fire, from iSecure Sensors/Transmitters; built in 85db UL siren & integral wireless receiver, up to 2 areas, support for 90 user codes plus OTA updates. Hub can go anywhere safe, stands or hangs on wall; plug-in AC power cord. Uses standard 4AH/12V backup battery for maximum power-outage protection. - 24hrs standby time, typ.
- **Home Automation Z-Wave Module Built in** in both iSecure Touchscreen Kits for IoT Connected Smart Home Control via iBridge App and/or iBridge Touch Touchscreen. Supports up to 232 Z-Wave devices for controlling lights, small appliances, temperature, locking etc. (preinstalled Z-Wave controller in hub)
- **StarLink Dual Path LTE cellular/IP Built In + StarLink-Tradeup-Incentive Eligible-** Saves up to half the system cost (\*\$100 StarLink Tradeup Incentive credit already reflected in net Kit prices shown, USD)
- **UL 85dB Siren built in**
- **Consumer Voice Prompts** (selectable on/off & volume levels)



GO-ANYWHERE SMART HUB (Included in all 3 Kits)

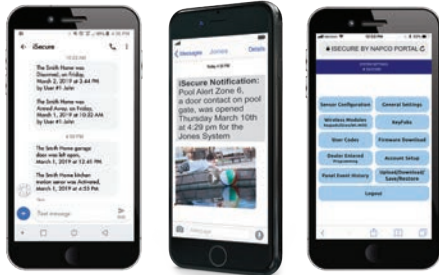

## SMART APP, NOTIFICATIONS & PROGRAMMING (All 3 Kits)

- **Easy Consumer App with Notification Alerts** put accounts in control of security system & home from smart phones or tablets, shows SMS/Text Notifications on events &/or MMS video messages with optional cameras/doorbell. Plus, with Touchscreen Kits controls Z-Wave Devices.
- **Easy Dealer Programming from Smart Phone/Device in minutes** using cloud-based portal with menu-driven screens and easy check-off selections. *No PC or laptop required.*

## INCLUDED SENSORS (Included in all 3 Kits)

- **iSecure Wireless Motion Sensor**, 50 x 50' broad coverage, fully-shielded PIR circuitry, battery-saver feature and long-life lithium-battery powered (supplied)
- **2ea. Wireless low-profile iSecure window/door Sensors**, compact, tamper-supervised, long-life lithium coin-cell battery-powered. (supplied)



(wireless 2 doors & a motion, incld all Kits)



## Choose Wireless Keypad Or 4" or 7" Touchscreens:

### WIRELESS KEYPAD

- **Wireless Keypad**, Digital Zone & Alpha/Icon Display, wall-mount keypad, OTA updates, long life lithium battery operation, keypad programming option. Use up to 5 keypads/touchscreens/system. *(Featured In Kit 1)*

### 4.3" SECURITY TOUCHSCREEN

- **Wireless 4.3" full color security touchscreen**, wall mount, with 12V power supply, intuitive central one-button arm/disarm operation, status icons plus full-function custom alpha keypad view. Smart App, OTA updates, tamper- and supervised-communications. System supports up to 5 touchscreens and/or wireless iSecure Keypads. *(Featured In Kit 2)*

### 7" MULTIFUNCTION CONNECTED HOME TOUCHSCREEN

- **Wireless 7" Advanced Touchscreen for Security/Live Video View/Smart Home controls w/ built in Z-Wave Controller.** Intuitive touchscreen control of security system &/or iBridge Video™ and Video Doorbell camera-viewing; built-in Z-Wave control automation of locks, lights, temp & small appliances, plus Notification Alerts on events or reminders. Use up to 5/system; fast, quad-core, Hi-Res 1024 x 600 capacitive TFT display. Wall mount, with 12V power supply (supplied). *(Featured In Kit 3)*

# iSecure 3 Professional iSecure Complete Cellular Alarm Kits:

## KIT01

### iSecure Kit 1 with Wireless LCD Keypad

- All-Inclusive:** Go-Anywhere Smart Hub w/ up to 80 zones/points, 85dB Siren and Dual Path Cell/IP Verizon® LTE Reporting built-in, **Wireless LCD Keypad** (lithium battery-powered), Security & Notifications from Consumer App, 50' Wireless PIR & 2 wireless window/door contact transmitters. Uses Pro 4Ah Battery for longest power outage protection (24hrs standby time, avg.)

#ISEC-KIT1, [iSecure KIT 1](#)



## KIT02

### iSecure Kit 2 with Color 4.3" Security Touchscreen

- All-Inclusive:** Go-Anywhere Smart Hub w/ up to 80 zones/points, 85dB Siren and Dual Path Cell/IP Verizon® LTE Reporting built-in, **Wireless Security Touchscreen**, **Built-in Z-Wave Control from Consumer App**, along with virtual keypad & SMS text notifications, 50' Wireless PIR & 2 wireless window/door contacts. Uses Pro 4Ah Battery for longest power outage protection (24hrs standby time, avg.)

#ISEC-KIT2, [iSecure KIT2](#)



## KIT03

### iSecure Kit 3 with Connected Home/Video/Security 7" Touchscreen

- All-Inclusive:** Go-Anywhere Smart Hub w/ up to 80 zones/points, 85dB Siren and Dual Path Cell/IP Verizon® LTE Reporting built-in; **Built-in Z-Wave Control** from touchscreen or App. **Wireless Multifunction 7" TFT Security Touchscreen controls smart automation, live video-viewing, notification alerts/alarms and home security functions.** One 50' Wireless PIR & 2 wireless window/door contact transmitters. Uses Pro 4Ah Battery for longest power outage protection (24hrs standby time, avg.)

#ISEC-KIT3, [iSecure KIT3](#)



## iSecure Optional Accessories:

**ISEC-WL-KEYPAD** Wireless LCD Keypad, lithium battery operation. Remote App control and notifications.

**ISEC-WL-TOUCH** 4.3" Touchscreen full color security touchscreen, graphical, custom alpha and keypad interface, App, notifications & Z-Wave Control. 150' range. 12V plug-in transf. incldd.

**IBR-TOUCH** 7" Multifunction Connected Home Touchscreen, security, live video view, smart home with Z-Wave control. Fast Hi-Res 1024 x 600 capacitive TFT display w/ quad-core processor. Wall mount, WiFi, 12V plug-in transf. incldd.

**ISEC-DW-XMITTER** Low Profile Wireless Window Door Transmitter

**ISEC-MOTION** Wireless Motion Detector, 50' Range, Battery-Saver Circuit

**ISEC-KEYFOB** 4-Button Keyfob, replaceable battery

**ISEC-PANIC** Waterproof 1-Button Panic Button with optional pendant chain

**ISEC-GLASSBREAK** Wireless Acoustic Glassbreak Detector

**ISEC-SMOKE** Wireless Smoke Detector

**ISEC-CARBON MON** Wireless Carbon Monoxide Detector

**ISEC-HEAT** Wireless 135° Rate of Rise Heat Detector

**ISEC-WL-SIREN** Wireless Extra Siren, AC Plug-in, Battery Backup

**ISEC-WL-MODULE** Takeover Module enables zones/devices from a preexisting system to be converted to wireless zones & added to the iSecure System.

## iBridge Video Cameras & Doorbell

**ISV2CAM Fixed Camera** 2.4GHz WiFi, 2-Way Audio, 1.3MP, 20/30fps, 32GB onboard storage, Multimedia/video clip (MMS) Notifications, plus 12-mos. cloud storage.

**ISV2PT Pan/Tilt Camera** 2.4GHz WiFi, 2-Way Audio, 1.3MP, up to 30fps, 32GB onboard storage, MMS Notifications, plus 12-mos. cloud storage.

**ISV2DOME Dome Camera** 2.4GHz WiFi, Outdoor-rated IP57, IK10 for wall, ceiling, eave mount, POE Ready option, 1.3MP, up to 30fps, 32GB onboard storage, MMS Notifications, plus 12-mos. cloud storage

**IBV-DBELL Video Doorbell** WiFi, Built-in Multidirectional Mic/speaker, 1080P Pro Grade w/ Night Vision, Dark Metallic Gray (standard). AC with full mounting hardware and 12-mos. cloud storage.

### A749 iSecure Trifold

Customizable consumer self-mailer, statement stuffer (**FREE**)

### A748 iSecure Brochure

Customizable 4pg consumer leave behind (**FREE**)



Napco Security Technologies, Inc.  
Amityville, NY 11701 | 1.800.645.9445 | [isecure@napcosecurity.com](mailto:isecure@napcosecurity.com)