

# A41

## 3MP Zoom Bullet with D/N, Adaptive IR, Extreme WDR, SLLS, 4.3x Zoom Lens



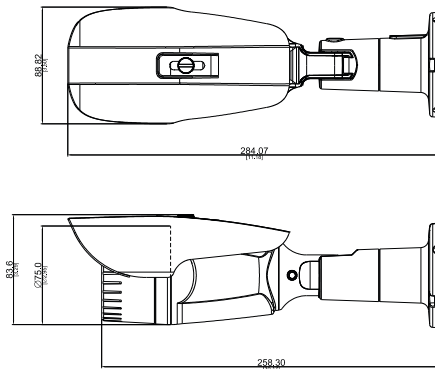
- 3 Megapixel with 1080p
- Day & Night with Superior Low Light Sensitivity and Adaptive IR LED
- 4.3x Zoom Lens with f2.8-12mm / F1.4-2.8, P-Iris, Auto Focus (for installation)
- Extreme WDR (142 dB)
- 30 fps at 2048 x 1536
- Weatherproof (IP66); Vandal Proof Metal Casing (IK10)

### PHOTO INDICATION






- |                      |                          |
|----------------------|--------------------------|
| ① Audio Output       | ⑤ Audio Input            |
| ② DC 12V Power Input | ⑥ Ethernet Port          |
| ③ Factory Reset      | ⑦ Digital Input / Output |
| ④ BNC Video Output   |                          |

### DIMENSION DIAGRAM



Unit: mm [inch]

### ACCESSORY OPTIONS

Power Supply		Popular Mounting Solutions	
PPOE-0001		IEEE 802.3af PoE Injector for Class 1, 2 or 3 devices, with universal adapter	
			
			

\* For more mounting solutions, please refer to Project Planner on [www.acti.com](http://www.acti.com)

## PRODUCT SPECIFICATION

### A41

#### • Device

Device Type	Outdoor Zoom Bullet Camera
Image Sensor	Progressive Scan CMOS
Sensor Size	1/2.8"
Effective Pixels	2048 (H) x 1536 (V) (3.1 MP)
Horizontal Resolution	1300 TVL
Day / Night	Yes
Low Light Sensitivity	Superior
Minimum Illumination	Color: 0.05 lux at F1.4 (30 IRE, 2400°K); B/W: 0 lux (IR LED on)
Mechanical IR Cut Filter	Yes
IR Sensitivity Range	700 - 1150nm
IR LED	Adaptive IR LED x 22 (850nm)
IR Working Distance	30 m (0 lux, 30 IRE, Gain 255, Auto shutter mode)
Electronic Shutter	1/5 ~ 1/16,000 sec (manual mode)
S/N Ratio	56 dB

#### • Lens

Focal Length / Aperture	Zoom, f2.8 - 12mm / F1.4 - 2.8
Zoom Ratio / Speed	4.3x optical / 1 sec (wide to tele)
Zoom Application	Camera Installation
Iris	P-iris
Focus	Auto focus
Lens Mount	Board mount
Horizontal Viewing Angle	90.6°~32.7°
Viewing Angle Adjustment	Pan: 0°-360°; Tilt: 0°-90°

#### • Video

Compression	H.265, H.264 (Baseline/ Main/ High profile), MJPEG
Max. Frame Rate vs. Resolution	30 fps at 2048 x 1536; 30 fps at 1920 x 1080; 30 fps at 1280 x 720; 30 fps at 800 x 600; 30 fps at 640 x 480; 30 fps at 320 x 240
Multi-Streaming	Simultaneous dual streams based on two configurations
Privacy Mask	4 Configurable regions
Image Enhancement	Extreme WDR (142 dB); White balance: automatic, manual; Brightness; Digital image stabilizer Contrast; Sharpness (auto); Auto gain control; 2D + 3D digital noise reduction; Defogging
Text Overlay	User defined text on video
Built-in Analytics	Tamper
Image Orientation	Mirror, Flip, Rotation

#### • Audio

Compression	8kHz, Mono, PCM, 16 bit encoding, G.711
Audio-In	3.5mm Phone Jack (Line in / Microphone in)
Audio-Out	3.5mm Phone Jack (Line out)

#### • Network

Protocol & Service	IPv4, IPv6, TCP, UDP, HTTP, HTTPS, SMTP, FTP, NTP, DNS, DDNS, DHCP, ARP, Bonjour, UPnP, RTSP, RTP, RTCP, IGMP, PPPoE, ICMP, SNMP, QoS
Ethernet Port	1, Ethernet (10/100 Base-T), RJ-45 connector
Security	IP address filtering; HTTPs encryption; Password protected user levels; Anonymous login

#### • Alarm

Alarm Trigger	Video motion detection (3 regions); External device through digital input; Sound detection; Tampering detection
Alarm Response	Notify control center; Change camera settings; Command other devices; E-mail notification with snapshots; Upload video or snapshot to FTP server; Activate external device through digital output

#### • Interface

Digital Input	1, Terminal Block
Digital Output	1, Terminal Block
Analog Video Output	1, BNC

#### • General

Power Source / Consumption	PoE Class 3 / 10W; DC 12V / 8 W
Weight	0.82 kg (1.807 lb)
Dimensions (Ø x H)	80 x 258.3 mm (3.15" x 10.17")
Environmental Casing	Weatherproof (IP66 rated)
Mount Type	Wall, Ceiling, Pole
Starting Temperature	-20°C ~ 50°C (-4°F ~ 122°F) within 30 minutes
Operating Temperature	-30°C ~ 50°C (-22°F ~ 122°F)
Operating Humidity	20% ~ 80% RH
Approvals	CE (EN 55022 Class A, EN 55024), FCC (Part15 Subpart B Class A), IP66, IK10 (metal casing), NEMA 4X

#### • Integration

Unified Solution	Fully compatible with ACTi software
ISV Integration	Software Development Kit (SDK) available; ONVIF compliant
GPS Position	Manual setting
Firmware Access Browser	Microsoft Internet Explorer 8.0 or newer (full functionality)

\* All specifications are subject to change without notice.

\* All brand names and registered trademarks are the property of their respective owners.

[www.acti.com](http://www.acti.com)

