

DS-2CD5546G0-IZHS/8

4 MP Outdoor Varifocal Network Dome Camera



DarkFighter.

The Hikvision DS-2CD5546G0-IZHS/8 Outdoor Varifocal Network Dome Camera provides high definition output. It supports H.265+ video compression, which assures savings in bandwidth and storage. Darkfighter technology allows for viewing and recording in ultra low-light conditions.

LightFighter.

- 1/1.8" (4 MP) Progressive Scan CMOS
- 2560 x 1440 Resolution @ 30 fps
- EXIR 2.0 with up to 100 ft (30 m) or 165 ft (50 m) IR Range
- New Anti-IR Reflection Capsule
- 2.8 to 12 mm or 8 to 32 mm Motorized Varifocal Lens Options
- Ultra-Low Light, 0.002 Lux (with f/1.2 Lens), Darkfighter Technology
- H.265+, H.265, H.264+, H.264
- 5 Defined Streams and 5 Custom Streams
- 140dB WDR, Lightfighter Technology
- Alarm and Audio Input/Output
- 12 VDC Accessory Output
- MicroSD Card Slot Supports 256 GB
- Anti-Fog Coating on Inside of Lens Cover
- IP67, IK10 Protection
- 12 VDC and PoE (802.3af)

With a WDR of 140 dB and Lightfighter technology, it provides superb image quality.

The camera can be equipped with a 2.8 to 12 mm or 8 to 32 mm motorized varifocal lens, and offers an EXIR 2.0 IR range of up to 100 ft (30 m) or 165 ft (50 m).

Smart features, such as line crossing, intrusion, scene change detection, and face detection are also supported.

Available models:

DS-2CD5546G0-IZHS
DS-2CD5546G0-IZHS8



Specifications

DS-2CD554660-IZHS

Camera

Image Sensor	1/1.8" Progressive Scan CMOS
Minimum Illumination	Color: 0.002 lux @ (f/1.2, AGC on), 0.005 lux @ (f/1.8, AGC on), 0 lux with IR
Shutter Speed	1 s to 1/100,000 s
Slow Shutter	Yes
Day/Night	IR Cut Filter
Digital Noise Reduction	3D DNR
WDR	140 dB
Angle Adjustment	Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355°

Lens

Focal Length	2.8 to 12 mm motorized varifocal lens	8 to 32 mm motorized varifocal lens
Aperture	f/1.2	f/1.8
Focus	Auto, semi-auto, manual	
FOV	2.8 to 12 mm, horizontal FOV 102° to 38°, vertical FOV 53.0° to 21.2°, diagonal FOV 122.2° to 45°	8 to 32 mm, horizontal FOV 37.7° to 15.2°, vertical FOV 21° to 8.6°, diagonal FOV 43.4° to 17.24°
Lens Mount	Integrated	

IR

IR Range	Up to 100 ft (30 m)	Up to 165 ft (50 m)
Wavelength	850 nm	

Compression Standard

Video Compression	Main stream: H.265+/H.265/H.264+/H.264; sub stream/third stream/fourth stream/fifth stream/custom stream: H.265+/H.265/H.264+/H.264/MJPE6
H.264 Type	Baseline profile/main profile/high profile
H.264+	Main stream
H.265 Type	Main profile
H.265+	Main stream
Video Bit Rate	32 Kbps to 16 Mbps
Audio Compression	G.711/G.722.1/G.726/MP2L2/PCM
Audio Bit Rate	64 Kbps (G.711)/16 Kbps (G.722.1)/16 Kbps (G.726)/32 to 192 Kbps (MP2L2)/128 to 768 Kbps (PCM)

Smart Features

Behavior Analysis	Line crossing detection, intrusion detection, region entrance detection, region exiting detection, unattended baggage detection, object removal detection
Exception Detection	Scene change detection, audio exception detection, defocus detection
Statistics	Counting
Face Detection	Yes
Region of Interest	Main stream/sub stream/third stream/fourth stream/fifth stream: four fixed regions for each stream, and dynamic face tracking

Image

Maximum Resolution	2560 x 1440
Main Stream	30 fps (2560 x 1440, 1920 x 1080, 1280 x 720)
Sub Stream	30 fps (704 x 480, 640 x 480)
Third Stream	30 fps (1920 x 1080, 1280 x 720, 704 x 480, 640 x 480)
Fourth Stream	30 fps (1920 x 1080, 1280 x 720, 704 x 480, 640 x 480)
Fifth Stream	30 fps (704 x 480, 640 x 480)
Custom Stream	30 fps (1920 x 1080, 1280 x 720, 704 x 480, 640 x 480); up to five custom streams are supported
Image Enhancement	BLC, HLC, 3D DNR, Defog, EIS
Image Setting	Rotate mode, saturation, brightness, contrast, sharpness, AGC, and white balance are adjustable by client software or web browser
Target Cropping	Yes
SVC	H.264 and H.265 encoding
Day/Night Switching	Day/night/auto/schedule/triggered by alarm in
Picture Overlay	Logo picture can be overlaid on video with 128 x 128 24 bit bmp format

Network

Network Storage	MicroSD/SDHC/SDXC card (256 GB), local storage and NAS (NFS,SMB/CIFS), ANR
Alarm Trigger	Motion detection, video tampering alarm, network disconnected, IP address conflict, illegal login, HDD full, HDD error
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, UDP, Bonjour
Security Measures	Password protection, HTTPS encryption, IEEE 802.1x port-based network access control, IP address filtering, basic and digest authentication for HTTP/HTTPS, WSSE, and digest authentication for ONVIF
General Function	One-key reset, anti-flicker, 5 streams and up to 5 custom streams, heartbeat, password protection, privacy mask, watermark, and IP address filtering
API	ONVIF (PROFILE S, PROFILE G), ISAPI, SDK
Simultaneous Live View	Up to 20 channels
User/Host	Up to 32 users. 3 user levels: administrator, operator and user
Client	iVMS-4200, Hik-Connect, Hik-Central
Web Browser	IE8+, Mozilla Firefox 30.0+, Google Chrome 31.0+, Safari 8.0+

Interface

Audio	1-ch 3.5 mm input (line in), 1-ch 3.5mm output, mono
Communication Interface	1-port RJ45 10M/100M/1000M Ethernet port
Alarm	1-ch input, 1-ch output (up to 24 VDC 1A or 110 VAC 500 mA)
Video Output	1 Vp-p composite output (75 Ω/CVBS)
Power Output	12 VDC, maximum of 200 mA (12 VDC, 24 VAC and PoE)
On-Board Storage	Built-in microSD/SDHC/SDXC slot, up to 256 GB
BNC	CVBS analog output (4CIF resolution), internal
Reset Button	Yes





Audio

Environment Noise Filtering	Yes
Audio Sampling Rate	8 kHz/16 kHz/32 kHz/44.1 kHz/48 kHz


General

Operating Conditions	-40° F to 140° F (-40° C to 60° C); humidity 95% or less (non-condensing)
Power Supply	12 VDC ± 20%, two-core terminal block; PoE (802.3at, class 4): 42.5 V to 57 V
Power Consumption and Current	12 VDC ± 20%: 1.4 A, maximum 17 W, PoE (802.3at, class 3): 42.5 V to 57 V, 0.3 A to 0.4 A
Protection Level	IP67, IK10
Heater	Yes
Material	Aluminum alloy
Dimensions	Camera: Ø 6.4" x 5.5" (Ø 162 mm x 140.3 mm)
Weight	Camera: 4.30 lbs (1.95 kg)

Accessories

			
WML + PC155 Wall Mount Long + 155 mm Pendant Cap	CPM + PC155 Ceiling Pendant Mount + 155 mm Pendant Cap	PM1 Pole Mount	CM1 Corner Mount

Dimensions

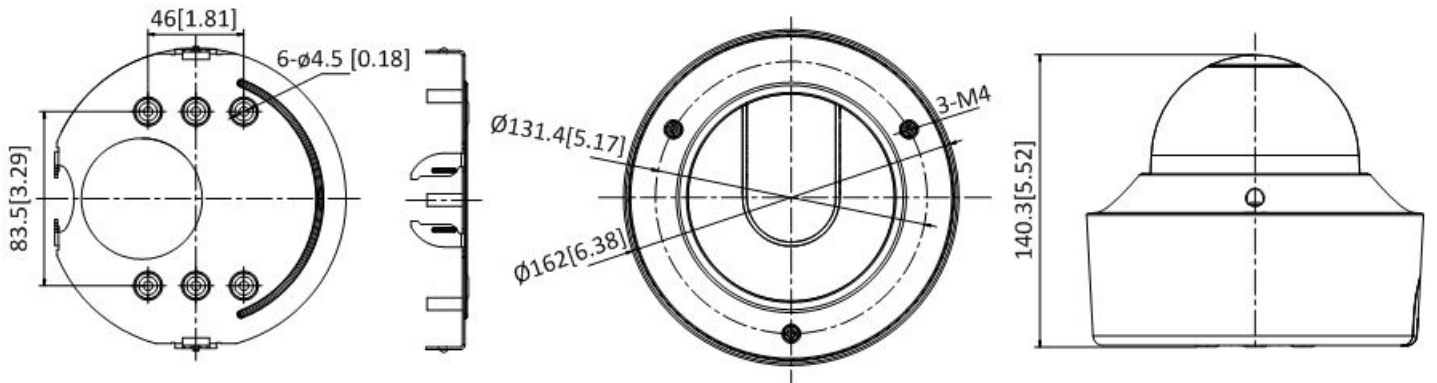

Unit: mm[inch]