

DS-KH8350-WTE1

Video Intercom Indoor Station



Hikvision's DS-KH8350-WTE1 Video Intercom Indoor Station features an 8.6 mm ultra-slim design, and a colorful 7" capacitive touch screen. It was a winner of the 2017 Reddot Award.

The indoor station can be combined with other Hikvision products and used to set up security solutions with varying levels of sophistication.

Available Models:


DS-KH8350-WTE1

- Premium Tempered Glass
- Aerospace-Grade Aluminum
- New UI v2.0: User-Friendly Aluminum
- 7" Colorful IPS Capacitive Touch Screen with 1024 x 600 Resolution
- 8.6 mm Ultra-Slim Design
- Reddot 2017 Award Winner
- Standard PoE
- Support Capture While Video Calling
- Remote Unlocking via Client Software or Mobile Client
- Views Live Videos of Door Stations and External Cameras

Specifications

DS-KH8350-WTE1	
System	
Memory	128 MB
Flash	32 GB
Operation System	Embedded Linux operating system
Display	
Display Screen	7" colorful IPS LCD
Display Resolution	1024 x 600
Operation Method	Capacitive touch screen, physical button
Audio	
Audio Input	Built-in omnidirectional microphone
Audio Output	Built-in loudspeaker
Audio Compression Standard	G.711 U
Audio Compression Rate	64 kbps
Audio Quality	Noise suppression and echo cancellation
Network	
Wired Network	10/100 Mbps Self-Adaptive Ethernet
Wireless Network	Wi-Fi 802.11b/g/n
Network Protocol	TCP/IP, SIP, RTSP
Network Interface	1-port self-adaptive RJ-45 10/100 Mbps
Alarm Input	8-ch alarm inputs
I/O Output	2
TF Card	Up to 32 GB, SD 2.0 or lower
RS-485	Supported
General	
Power supply	12 VDC/1 A, IEEE802.3af, standard PoE
Power supply via detector	12 V, 200 mA
Power consumption	≤7 W
Working temperature	14° F to 131° F (-10° C to 55° C)
Working humidity	10% to 95%
Dimensions (W × H × D)	7.09" x 5.51" x 0.88" (180 mm x 140 mm x 22.4 mm)
Mounting	Surface mount
Certification	FCC, IC, CE, C-TICK, ROHS, REACH, WEEE, UL, CB, RCM

Appearance and Interface

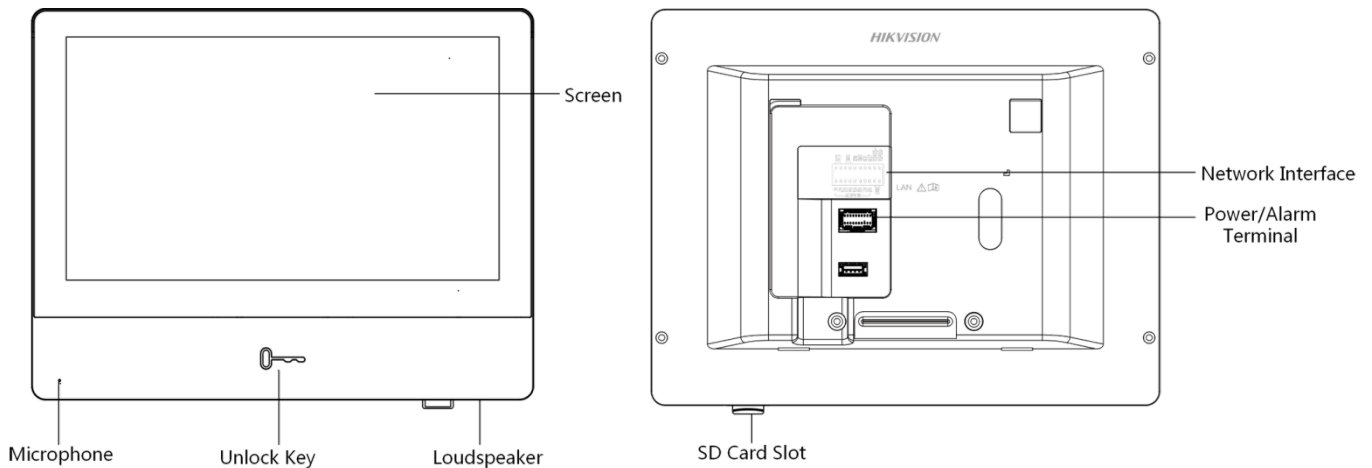

Typical Application

