

## ECI-B64Z2

### 4 MP Outdoor EXIR Varifocal Network Bullet Camera



- 1/3" (4 MP) Progressive Scan CMOS
- Up to 2560 x 1440 Resolution
- 2.8 mm to 12 mm Motorized Varifocal Lens
- EXIR 2.0 with up to 100 ft (30 m) IR Range
- H.265+/H.265/H.264+/H.264/MJPEG
- 120 dB True WDR Produces Clearer Image
- MicroSD Card Slot Supports 128 GB
- IP67 Protection
- Durable Metal Housing
- 12 VDC  $\pm$ 25% (PoE IEEE802.3af), Max. 11 W

The Hikvision ECI-B64Z2 Outdoor EXIR Varifocal Bullet Camera provides high definition network output. It supports H.265+ video compression technology, which assures savings in bandwidth and storage.

EXIR 2.0 is Hikvision's proprietary IR extended range technology, which has a range of 100 feet (30 meters).

The 2.8 mm to 12 mm motorized varifocal lens is optimized for viewing angles that fit any situation. This flexible technology allows for the angle of view to be changed at will in order to focus on an area of interest.

**Available models:**  
ECI-B64Z2



# Specifications

<b>ECI-B64Z2</b>	
<b>Camera</b>	
Image Sensor	1/3" [4 MP] progressive scan CMOS
Minimum Illumination	Color: 0.018 lux @ (f/1.6, AGC on)
Shutter Speed	1/3 s to 1/100,000 s, slow shutter supported
Slow Shutter	Yes
Auto-Iris	No
Day/Night	IR cut filter
Digital Noise Reduction	3D DNR
WDR	120 dB
Angle Adjustment (Bracket)	Pan: 0° to 360°, tilt: 0° to 90°, rotation: 0° to 360°
<b>Lens</b>	
Focal Length	2.8 mm to 12 mm
Aperture	f/1.6
Focus	Automatic
FOV	Horizontal field of view: 98° to 28°; vertical field of view: 51° to 16°; diagonal field of view: 115° to 32°
Lens Mount	Ø14
<b>IR</b>	
IR Range	Up to 100 ft (30 m)
Wavelength	850 nm
<b>Compression Standard</b>	
Video Compression	Main stream: H.265+/H.265/H.264+/H.264; sub-stream: H.265+/H.265/H.264+/H.264 / MJPEG
H.264 Type	Baseline profile/main profile/high profile
H.264+	Main stream
Video Bit Rate	32 Kbps to 8 Mbps
<b>Smart Features</b>	
Region of Interest	One fixed region for main stream and sub-stream
<b>Image</b>	
Maximum Resolution	2560 x 1440
Main Stream	20 fps (2560 x 1440), 30 fps (2304 x 1296, 1920 x 1080, 1280 x 720)
Sub-Stream	30 fps (640 x 480, 640 x 360, 320 x 240)
Image Enhancement	BLC, 3D DNR
Image Setting	Saturation, brightness, contrast, sharpness, AGC, white balance adjustable by client software or Web browser
Day/Night Switch	Auto, scheduled
<b>Network</b>	
Network Storage	Support for microSD/SDHC/SDXC card (128 GB), local storage, and NAS (NFS,SMB/CIFS), ANR
Alarm Trigger	Motion detection, video tampering alarm, network disconnected, IP address conflicted, and illegal login
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, UPnP, SMTP, IGMP, 802.1x, QoS, IPv6, UDP, Bonjour
General Function	One-key reset, anti-flicker, heartbeat, mirror, password protection, privacy mask, watermark
API	ONVIF (PROFILE S, PROFILE G), ISAPI
Simultaneous Live View	Up to 6 channels
User/Host	Up to 32 users; three levels: administrator, operator, and user
Client	iVMS-4200, Hik-Connect
Web Browser	IE 8+, Chrome 31 to 44, Firefox 30.0 to 51, Safari 8.0+
<b>Interface</b>	
Communication Interface	1-Port RJ-45 10M/100M self-adaptive Ethernet port
Reset Button	Yes
<b>General</b>	
Operating Conditions	-22° to 140° F [-30° to 60° C]; humidity: 95% or less (non-condensing)
Power Supply	12 VDC ±20%, 5.5 mm coaxial power plug; PoE (802.3af, class 3)
Power Consumption and Current	12 VDC, 0.9 A, maximum: 11 W; PoE: (802.3af, 36 V to 57 V), 0.4 A to 0.2 A, maximum: 12.9 W
Protection Level	IP67, TVS 2000V lightning protection, surge protection, and voltage transient protection
Material	Metal
Dimensions	4.1" x 4.1" x 5.7" (105 mm x 105 mm x 145 mm)
Weight	Camera: 2.3 lbs (1.04 kg)


## Accessories (Not Included)

<b>PM</b> Pole Mount	<b>CM</b> Corner Mount	<b>CB130</b> Conduit Base	<b>CBS</b> Conduit Base	<b>ABS</b> Angled Base

## Box Contents (Subject to Change without Notice)

- Quick Start Guide
- Screws
- Watertight Cable Connector
- Wrench

# Dimensions

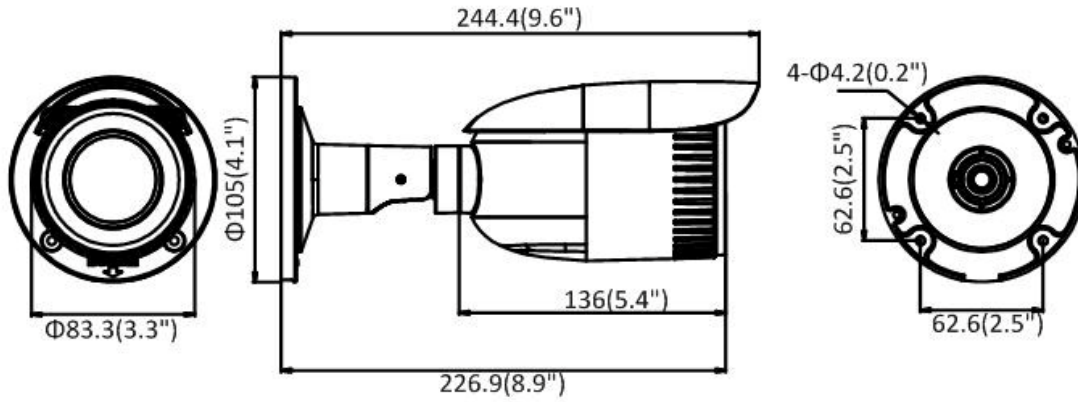

Unit: mm (inch)