


# PD4ULCB

## UL Listed Power Distribution Module

### Description

Altronix PD4ULCB UL Listed Sub-Assembly power distribution module is designed to convert a single AC or DC input into four (4) PTC protected Class 2 Rated power-limited outputs.

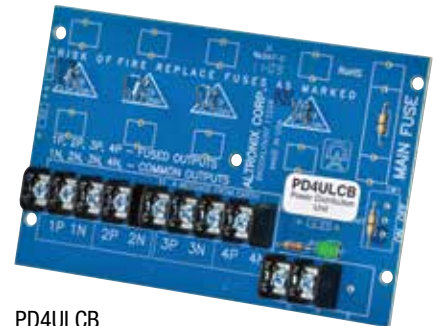

PD4ULCB

### Specifications

#### Input

Voltage Range 12VDC or 24VDC, up to 10A or  
24VAC or 28VAC, up to 12A.

#### Outputs

Four (4) PTC protected Class 2 Rated power-limited outputs (auto-resettable).

2A per output max.

Total output current should not exceed max current rating of power supply employed.

PTCs are rated @ 2A/250V.

#### Indicators (LED)

DC Output Power LED.

#### Agency Listings

##### UL:

Access Control	UL294
Burglar Alarm	UL603
Fire Alarm	UL1481

##### cUL:

General Signaling Equipment Evaluated to  
CSA Standard C22.2 No.205-M1983.  
Power Supplies for Burglar Alarm Systems  
ULC-5318-96.

#### Physical and Environmental

##### Dimensions (L x W x H)

5.25" x 3.25" x 1" (133.4mm x 82.6mm x 25.4mm).

Product Weight 0.15 lbs. (0.07 kg).

Shipping Weight 0.25 lbs. (0.11 kg).

##### Temperature

Operating 0°C to 49°C (32°F to 120°F).

Storage -20°C to 70°C (-4°F to 158°F).

Relative Humidity 85% +/-5%.

# PD4ULCB

## UL Listed Power Distribution Module

### Board Dimensions (L x W x H) and Drawing

5.25" x 3.25" x 1" (133.4mm x 82.6mm x 25.4mm)

