


# PoE201

## 56VDC/120W Power Supply/Charger

### Description

Altronix PoE201 provides 120W for NetWay Spectrum switches with 1Gb SFP ports. It also features a built-in charger for sealed lead acid or gel type batteries.

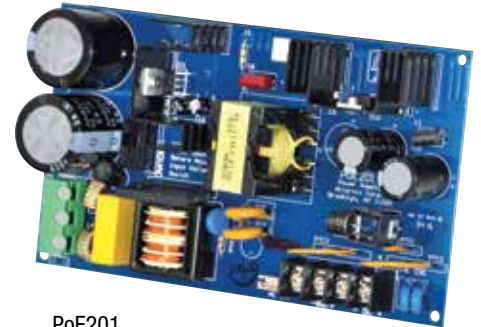

PoE201

### Specifications

#### Input

Voltage 115VAC, 60Hz, 2.5A or  
230VAC, 50/60Hz, 1.3A

#### Output

Voltage 56VDC/120W.  
Current 2.2A continuous supply current.  
Maximum Power 120W total power.  
Integral surge protection.

#### Back-up Battery *(not included)*

Built-in charger for sealed lead acid or gel type batteries.  
Automatic switch over to stand-by battery when AC fails.

#### Physical and Environmental

##### Dimensions (L x W x H)

7.0" x 4.0" x 1.375" (177.8mm x 101.6mm x 34.9mm).

Product Weight 0.7 lbs. (0.32 kg).

Shipping Weight 1.1 lbs. (0.5 kg).

##### Temperature


Operating (120W): -30°C to 75°C (-22°F to 167°F).

Storage -30°C to 85°C (-22°F to 185°F).

Relative Humidity 85% +/-5%.

BTU/Hr (approx.): 61 BTU/Hr.

### Typical Applications

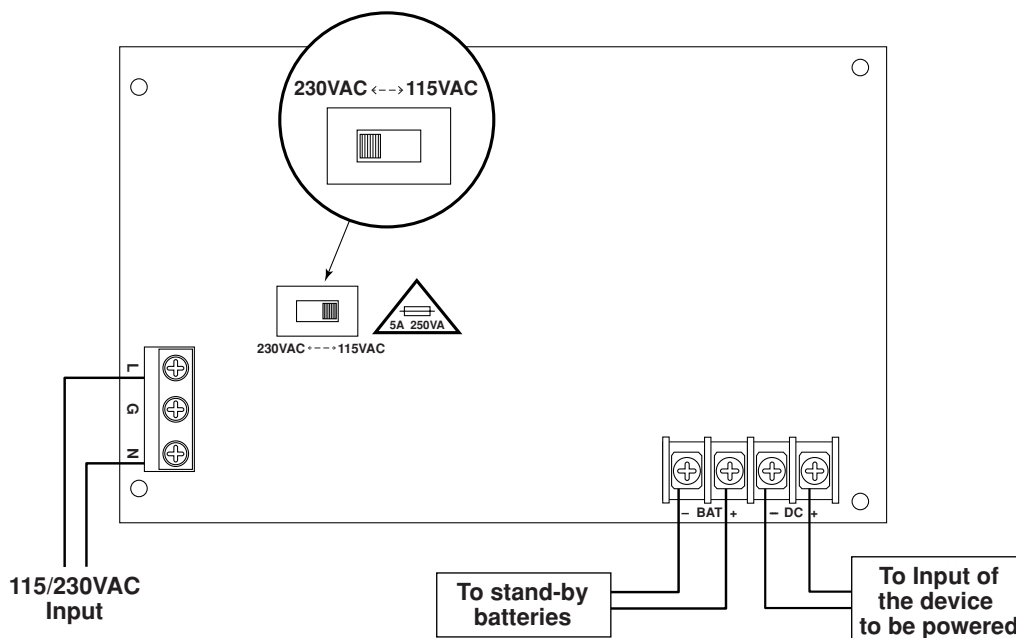

# PoE201

## 56VDC/120W Power Supply/Charger



### Board Dimensions (L x W x H) and Drawing

7.0" x 4.0" x 1.375" (177.8mm x 101.6mm x 34.9mm)

