


Model UT

Universal Timer

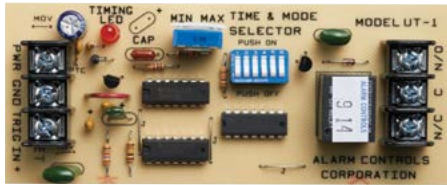

Specifications

- Size: 2-1/8" x 5-3/16"
- Voltage range:
 - UT-1: 12 VDC
 - UT-1-24V: 24 VDC
- Current Draw: 37 mA (maximum)
- Contact rating: 10A at 35 VDC or 125 VAC
- Temperature rating: -13 to +158F [-25 to +70C]
- Contact arrangement: SPDT

Features

- Time range: 1 second to 1 hour
- Mounting: adhesive foam tape
- Four modes of operation:
 - Delay on operate
 - Delay on release
 - One shot
 - Pulsing

Options

- Order UT-1 24 V for 24 VDC Model

Models

UT-1

Programmable Digital Timer, 12 VDC

UT-1 24 V

Programmable Digital Timer, 24 VDC

ALARM CONTROLS



ASSA ABLOY