

Overview

Altronix Vertiline CCTV Rack Mount Power Supplies provide 24 power outputs in a space saving 1U EIA 19" rack mount chassis which may be rack, wall or shelf mounted. The units feature individually selectable 24VAC and/or 28VAC power outputs with surge suppression. Vertiline CCTV Rack Mount Power Supplies are also available in eight (8) and sixteen (16) output models with various power ratings.

VERTILINE[™]

Specifications

Input:

- 115VAC 60 Hz., 4 amp.

Output:

- Twenty-four (24) individually selectable 24VAC or 28VAC power outputs with OFF position.
- 24VAC or 28VAC @ 14 amp total output current.
- Twenty-four (24) external blade fuse protected outputs rated @ 3 amp (VertiLine246C).
- Twenty-four (24) PTC protected outputs rated @ 2.5 amp (VertiLine246CD).
- Main fuse rated @ 15 amp.
- Surge suppression.

Visual Indicators:

- Twenty-four (24) individual power LEDs.

Features:

- Illuminated master power disconnect circuit breaker with manual reset.
- IEC 320 - 3-wire grounded line cord (detachable).
- Removable terminal blocks with locking screw flange.
- Spare fuses provided.
- Ease of installation saves time and eliminates costly labor.
- Compact 1U rack mount chassis.
- Fits standard EIA 19" rack.
- Units can be rack, wall or shelf mounted.

Shipping Weight (approximate):

- VertiLine246C: 21.0 lbs.
- VertiLine246CD: 21.0 lbs.

Models

VertiLine246

CCTV Rack Mount Power Supply
w/twenty-four (24) fuse protected outputs.

VertiLine246D

CCTV Rack Mount Power Supply
w/twenty-four (24) PTC protected outputs.

Agency Approvals



UL Listed for Commercial CCTV Equipment
(UL 2044).




CUL Listed - CSA Standard C22.2 No.1-04,
Audio, Video and Similar Equipment.

1U EIA 19" Rack Mount Chassis Mechanical Drawing & Dimensions:

1.625"H x 19.125"W x 8.5"D

REAR

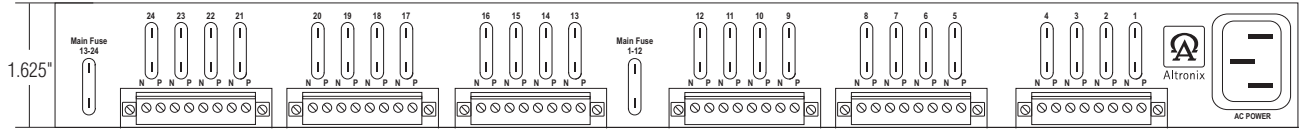

TOP & BOTTOM



FRONT

