



## Monitors

3.5" LCD Service Monitor with Multimeter

# ZM-L35T

GANZ model ZM-L35T combines a video test monitor with six essential CCTV functions, all in a compact design with a rechargeable lithium ion battery.


### Features:

- 3.5" LCD screen
- 5~6 hours of operation between charges
- Measures 20~250 VAC and 0~45 VDC
- Pelco P & D protocol for PTZ testing
- 0~2Vpp video level measurement
- Built-in speaker for audio testing
- Open or short circuit cable test feature
- Video pattern generator
- Includes wrist strap, protective case and AC adapter

# ZM-L35T

## 3.5" LCD Service Monitor with Multimeter

### ■ Monitor front with test cables (included)

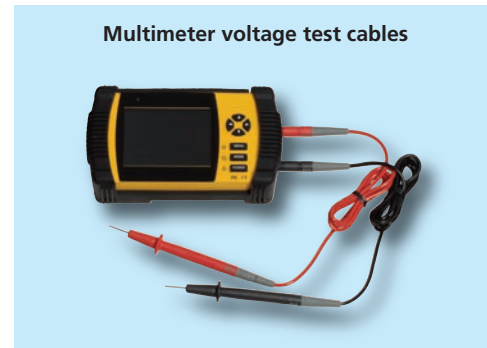

### ■ Specifications

Model	ZM-L35T
Display Size	3.5"
Panel Backlight	LED type
Display Resolution	320 x 240
Charge Voltage	4.2V (+/- 10%)
Battery	2200mA, Lithium Ion Battery
Charge Time	2 ~ 3 hours
Standby Time	5 ~ 6 hours
Video Level Measurement	0 ~ 2Vpp (Voltage peak-to-peak value) NTSC / PAL auto detection
Pattern out	8-Color bars with 1V standard Vpp
PTZ Protocol	PELCO P & D
Protocol Baud Rate	2400 / 4800 / 9600 bps
AC Voltage Range	20 ~ 250 V
DC Voltage Range	0 ~ 45 V
Audio Test	Built-in speaker for testing (8Ω / 1W)
Cable Test	Open or Short Circuit Test (x 2 sets)
Firmware Upgrade	On-site Upgrade by ISP interface
Weight	2.4 lbs / 1.07kg
Dimensions	6.1"W (156mm) x 3.5"H (90mm) x 1.5"D (38mm) (with safeguard cover)
Operating Temperature	32°F ~ 113°F / 0°C ~ 45°C
Storage Temperature	-4°F ~ 113°F / -20°C ~ 45°C

*All specifications are subject to change without notice. Go to [www.computarganz.com](http://www.computarganz.com) for the latest specifications*

### Models available from 4" to 22" HD - see online catalog for details



4" Service Monitor  
ZM-L304N



8" Monitor  
ZM-L8A



17" & 19"  
Monitors (VGA only)  
LCD Series



17" & 19"  
Monitors  
ZM-L Series



20" LCD  
ZM-L20A-HR



22" PDM  
ZM-L22PD



22" HD  
ZM-L22A-HD